
118 Arrow Trax™

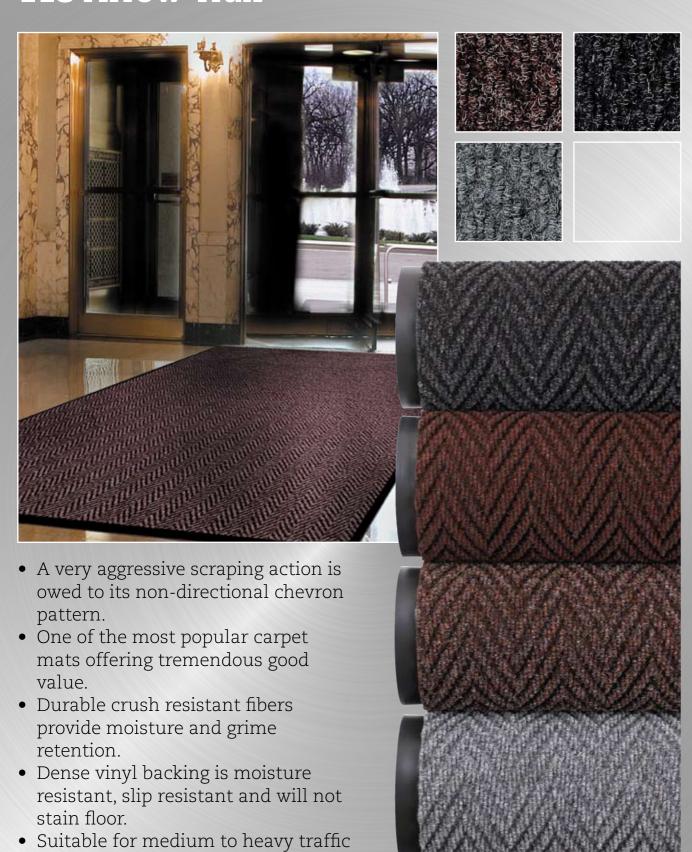

shopping malls.

• Vacuum clean.

conditions.

• Free of toxic DOP and DMF.

• For placement inside entrances in schools, universities, public

buildings, offices, sports facilities,

118 Arrow Trax™

			PRODUCT SPECIFICATIONS		
Designation Dus		Dust Control Matting	rust Control Matting		
Description		Absorbent - scraper carpet mat			
Material					
		Needle punched carpe tern1200 grams of fibe	pet consisting of anti-static 100% polypropylene fibers with chevron pat- pers per m².		
	Backing	Black vinyl			
Process		Needle punch			
Category		Indoor absobent - Bestseller			
Recommended use		Indoor - medium to heavy foot traffic, indoors			
Colours		Grey, Charcoal, Brown, Automn Brown			
Weight		3.9 kg/m ²			
Thickness		10 mm			
Standard sizes		60 cm x 90 cm 90 cm x 150 cm 120 cm x 180 cm 130 cm x 300 cm 130 cm x 600 cm 130 cm x 20 m 200 cm x 20 m			
Custom sizes 130 cm and		130 cm and 200 cm pe	cm and 200 cm per linear meter		
Special remarks		Splicing, seaming not recommended			
			PRODUCT TESTING		
	To	ests	Norms	Results	
Abrasion resistance			ASTM D3884	1.68 g weight loss	
Colour fastness to light			AATCC 16E	5	
Accelerated wear test by sim floor machine			U.S.	2.5	
Accelerated soiling			U.S.	4	
Anti-slip			DIN51130 BGR181		
Water retention			ISO 4920 TNO W6034	4.0 l/m ²	
Sanitary epidemiologic test		c test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.229.P.044984.07.09	
Graves tea	r strength				
Hardness a	a shore				
Elongation					
			FIRE TESTING		
		Surface Flammability	ASTM D2859	Pass	
		Russian fire retardancy test	CCPB.NLOP-019.B01723	Pass	
		Classification of the reaction to fire performance	DIN EN 13501-1		
Sustainability			 Recyclable material REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals) Contributes to cleaner environment by reducing need of cleaning chemicals 		