




Superior
Manufacturing
Group, Inc.

737 Diamond Plate Runner

Industrial & Commercial Runners

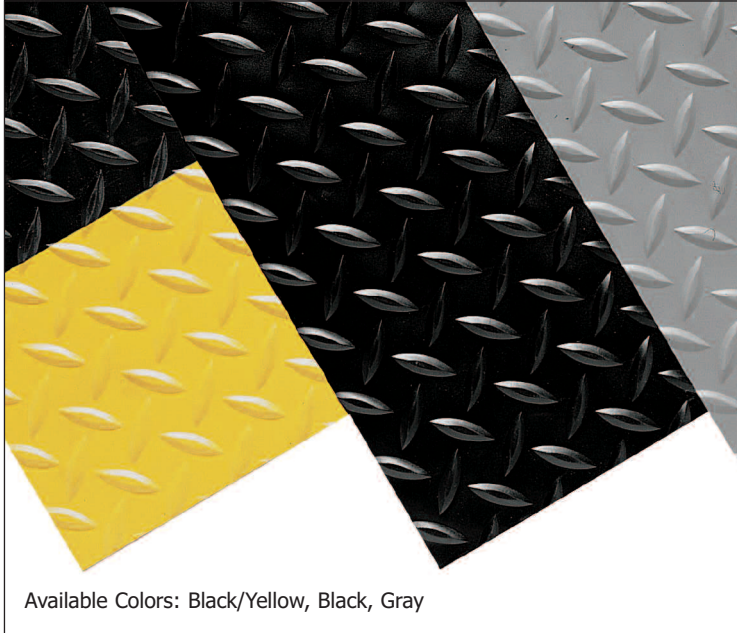

Available Colors: Black/Yellow, Black, Gray

Good Better Best Superior



The high profile diamond-embossed top surface yields exceptional traction from any direction. Made of durable vinyl, this runner is easy to sweep clean and has a low profile allowing for easy on/off cart traffic. Diamond Plate Runner is recommended for applications where safety and slip protection is needed with minimal anti-fatigue value such as aisles, warehouses, vending areas, and industrial passageways.

Test	Test Description	*Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	N/A
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.65
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	3.02 Grams
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.	150%
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions	88

*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.



Custom Lengths



Anti-Slip

- Thickness: 5/32"
- Weight: .90 lbs/sq. ft.
- Stock Sizes: (Rolls) 2' x 75', 3' x 75', 4, x 75'
- Custom sizes available in 2', 3', and 4' widths



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® FLOOR SERVICE MATS