


# 573 De-Flex™ ESD

ESD modular mat with dual locking connection

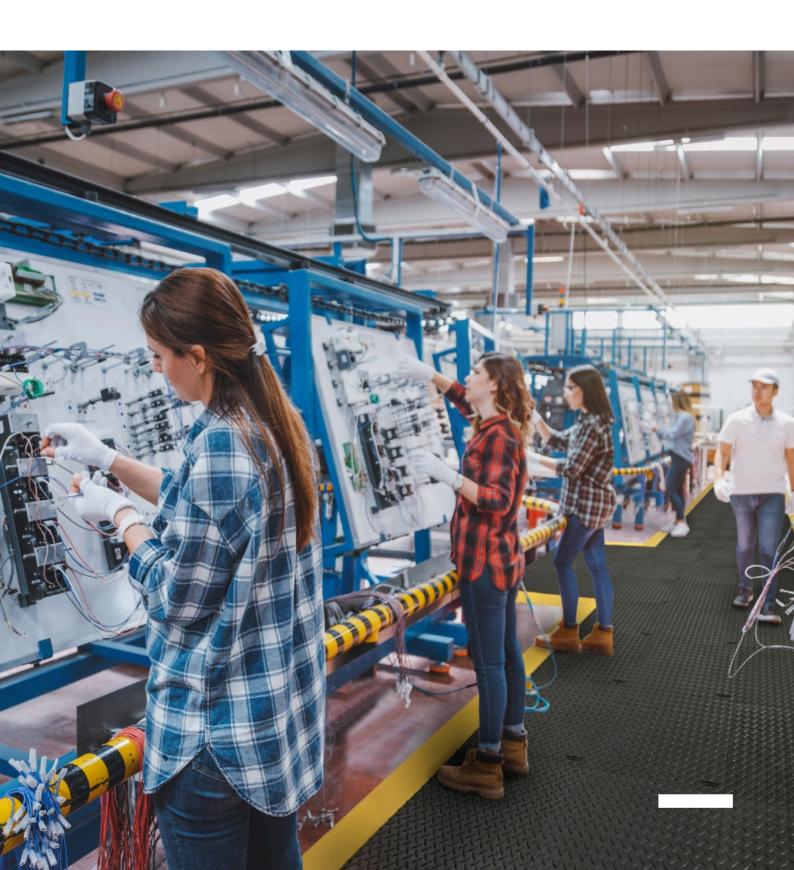

## Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories 573 De-Flex™ ESD

Extremely comfortable heavy duty anti-fatigue matting system with popular diamond plate traction surface that can be easily assembled for coverage of large areas or individual workstation mats.

- Modular rubber tiles are designed with a universal double-locking system on all sides to ensure an extra strong yet seamless connection for fast installation
- The 19 mm thick platform insulates the worker from the hard ground while the bulleted domes underneath allow the mat to bend and flex with every movement
- Unique extended ramp prevents tripping and allows cart access with smart bevelling solutions for inside and outside corners

#### Recommended use

- Dry Areas
- For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.
- Heavy duty

#### Colors:


Black


#### Sizes:

- 45cm x 45cm
- 45cm x 45cm

#### Accessories:

- 825-C
- 051 ESD Floor Grounding Cord
- 571 De-Flex™ Safety Ramp Nitrile























# Ergonomic, Anti-fatigue & Safety Matting - ESD Matting & Accessories $De\text{-Flex}^{\text{TM}}$ ESD

## General

Brand	Notrax		
Category	ESD Matting & Accessories		
Product Number	573		
Product Family	Industrial & Commercial Matting		
Product Group	Ergonomic, Anti-fatigue & Safety Matting		
Product Name	De-Flex™ ESD		
Recommended use	For placement in ESD assembly lines, picking, packing and logistics warehouses, individual work stations.		
Series	De-Flex®		
Shipping Location	Barendrecht 2992SB, NL, Chicago, IL 60638, US		
Туре	Dry Areas - Heavy Duty Modular Rubber Mats		
Update trigger	20210310-1301		
Usage Intensity	Heavy duty		

# Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
-------	---


## Tests

Fire rating US	Pass
Slip Rating	R10

# **Technical Specifications**

Application	Dry industrial environments	
Edges	Attachable bevelled edges are available	
Material	Static dissipative natural rubber	
Material Group	Rubber	
Process	Compression Moulding	

# De-Flex™ ESD Black





573S1818BL

573B1818BL

Art. nr.	Dimension (cm)	Weight (kg)	Height (cm)
573S1818BL	45cm x 45cm	3.3	1.9
573B1818BL	45cm x 45cm	26.4	1.9

## Accessories

825-C

051 ESD Floor Grounding 571 De-Flex  $^{\text{TM}}$  Safety Cord Ramp Nitrile